

Geologic Atlas User's Guide: Using Geologic Maps and Databases for Resource Management and Planning

Minnesota Geological Survey
Open-File Report OFR-12-1

2012



Table of Contents

Cover Page	i
Part 1: Purpose , History, and Ground Water Basics.....	1
Introduction	1
History	2
Organization and Formats.....	2
Minnesota Geology and Water Basics	3
The Hydrologic Cycle in Minnesota	3
The Distribution of Precipitation and Recharge in Minnesota.....	4
The Distribution of Water in Minnesota’s Geologic Framework	5
The Time Factor	6
Managing Water Quality and Quantity Goals	7
Water Budgets	7
The Impacts of Pumping	8
How Much Is Too Much?.....	8
Managing Water Quality.....	9
Keeping Track- How Are We Doing?	9
Modeling- Predicting Outcomes	9
Guidance and Best Practices for Water Management:.....	10
Part 2: the Elements of a Geologic Atlas - how they are made, and how they can be used.....	10
Databases	10
County Well Index (CWI)	11
Quaternary Data Index (QDI)	12
Geophysical Data	12
Surficial Geologic Maps	14
Quaternary Stratigraphy, and Sand Distribution Models.....	16
Sand Distribution Models.....	17
Bedrock Topography and Depth to Bedrock Maps	18
Bedrock Geology Maps	19
Geologic Atlas Uses	21
Summary	22

Geologic Atlas User's Guide:

Using Geologic Maps and Databases for Resource Management and Planning

Dale Setterholm
Minnesota Geological Survey
Version 1.0
2012

Part 1: Purpose , History, and Ground Water Basics

Introduction

If you think of earth as our home, we spend almost all of our time on the main floor, and very little in the basement. We travel the land surface, interact with its features, and learn about it through our senses of sight, sound, and touch.

However, some of the things we depend on the most come from beneath the land surface. We need energy, building materials, shelter, waste disposal, and most importantly, water.

Many of us have had little opportunity or need to learn about those aspects of the earth. As our population grows and our material requirements increase human impact on energy and water resources also increases, and we need to understand the workings of our home more fully for it to provide what we need now and into the future.

We wouldn't try to manage our road network without maps to record where the roads are, what their characteristics are (number of lanes, pavement type, speed limits, etc.), and how they connect to each other. Similarly, to manage resources such as our water supply we need maps that indicate where water is stored (aquifers), and how those aquifers are connected to the land surface, to surface waters, to wells, and to each other.

A geologic atlas is intended to describe the geologic framework of our home and how the subsurface environment provides the resources we need. It describes the materials and features that begin just beneath the soil and it continues down to the bedrock surface and beyond.

The atlases provide information useful for resource management and land use planning. Sometimes they utilize terminology and concepts familiar to geologists and hydrologists that may be challenging to non-specialists. This

guide is intended to overcome that gap and explain how an atlas is created, and more importantly how it can be used to support decisions that affect these essential resources.

Each atlas typically requires more than 7,000 person-hours of work. Some of that work is in the field: drilling test borings, examining, sampling, and describing outcrops where the rock or sediment beneath the soil becomes visible at the land's surface, and conducting seismic tests to measure the depth to bedrock, [sending tiny shock waves into the earth and measuring how long it takes them to rebound]. One of the most important parts of the field work, and a part often performed by county staff as a contribution to the overall effort, is establishing the exact location and land surface elevation of hundreds of wells. Much of the work that goes into preparing the atlases follows after: interpreting the field measurements, recognizing and formally naming geologic units described in well records, and making maps.

The result is a detailed account, mostly in the form of maps, of the distribution and properties of the rock and sediment that lie below the land surface. These materials, and their ability to store or transmit water, determine where we can find water, and how we can protect and make wise use of that water. This includes our lakes and rivers as well as ground water.

The introduction of computer-based methods of managing information about places, called geographic information systems, has enhanced the usability of geologic information by making it relatively easy to create maps customized for specific uses. Traditional geologic maps required far more interpretation by the user to be applied to specific management issues. The atlases are delivered in both traditional and geographic information system (GIS) formats.

This User's Guide is intended for people that don't have training in geology or hydrology- most people. Every Minnesotan uses water, and every Minnesotan has an effect

on water, so we all have a role and an interest in how that resource is distributed, how it is used, and how we affect its quality and availability. The purpose of the Guide is to explain in simple terms where our water comes from, how geology and climate control its distribution, and how we can manage water to maximize the availability of high quality water for ourselves and the habitat we live in. The atlases can provide very practical information such as what aquifers

provided funding or in-kind service. However, in recent years the Environment and Natural Resources Trust Fund, as managed by the Legislative and Citizen's Commission on Minnesota Resources, has been the most important single source of funding to the program.

The atlases are generally highly valued by the counties, and also by consultants, state agencies, federal agencies, educators, researchers, well contractors, and citizens. The selection of counties has been influenced by population (an attempt to serve as many people as possible), by ground water sensitivity (providing guidance where resources are most threatened) and by the interest of local decision-makers (providing atlases where there is local interest in utilizing them for sound resource management).

Most atlas maps are published at 1:100,000 scale [one inch on the map = 1.6 miles on the ground]. This is detailed enough to depict features that significantly influence ground water flow, and yet doesn't require data density that would be too costly to be practical. The early atlas map plates were hand drafted, turned into color separate negatives and offset printed. Recent atlases are still printed (although fewer copies are made) to serve users who prefer that format, but all of the information on the plates and much more is also compiled in digital format, primarily as geographic information system (GIS) files, that allow users to combine the information with additional non-geologic data, create custom maps, and if desired three-dimensional images.

The first atlases were created solely at the MGS, but starting with publication of the Fillmore County Atlas in 1995 atlases have been produced in two parts. The MGS describes the geologic framework, and the Department of Natural Resources, Division of Ecological and Water Resources describes ground water conditions and sensitivity. The MGS created a Regional Hydrogeologic Assessment (RHA) of the Anoka Sand Plain area in 1993. Between 1995 and 2008, the MGS and the DNR also produced RHAs of multi-county areas in western Minnesota. These studies are not as comprehensive as county atlases, but there is some commonality in products, and this guide is also pertinent to those products.

Organization and Formats

All atlases include a series of maps in printed form. Those maps are supported by associated databases, but it was not feasible to deliver all the data in the early years of the program. Modern atlases provide the printed maps, digital reproductions of the maps in portable document files (pdfs), and maps with associated data tables in GIS formats that can be used with free GIS software, or with fully-functioned commercial GIS software. The digital products are available from the MGS and DNR web sites, or on a DVD. The printed materials and DVDs can be purchased at the MGS Map Sales Office, and digital files can be downloaded without

County Geologic Atlas Part A Coverage

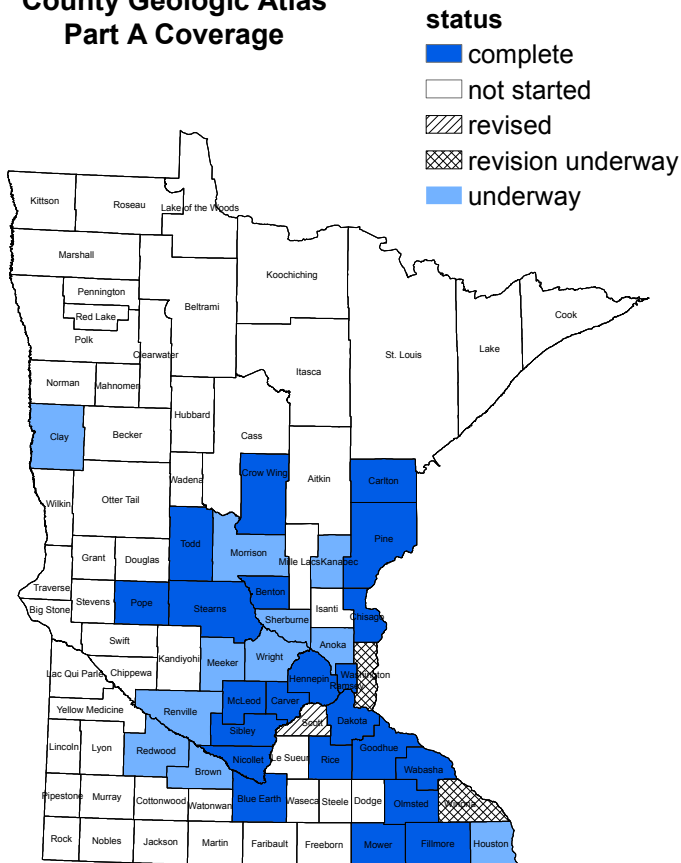


Figure 1. Status of County Geologic Atlas Program-09/2012

are available to a homeowner that needs to drill a well. The atlases also work at larger scales answering questions such as “where is the largest or most productive aquifer in this county”, or conversely, “where is the best place in this county to isolate potential contaminants from our water system?”. The atlases document existing hydrologic conditions, such as water levels in aquifers, so that we can recognize and respond to changes in those levels if necessary.

History

The Minnesota Geological Survey (MGS) produced the Scott County Geologic Atlas in 1982. In the nearly 30 years since, the MGS has completed atlases for 23 more counties and projects are under way in 11 more counties (Figure 1). Funding has always been a limiting factor in accomplishing this work. The Division of Ecological and Water Resources at the Department of Natural Resources (DNR) has provided funding for many years, and the counties themselves have

charge (<http://www.mngs.umn.edu>). If the home page has changed, do a web search for Minnesota Geological Survey to find the current link.

The geologic components of an atlas are referred to as Part A, and the hydrologic components as Part B. This document focuses mainly on the products of Part A; a companion document describing Part B products may follow.

Minnesota Geology and Water Basics

This section provides an overview of water distribution, and the implications for a long term supply of high quality water. It describes the hydrologic system in general,

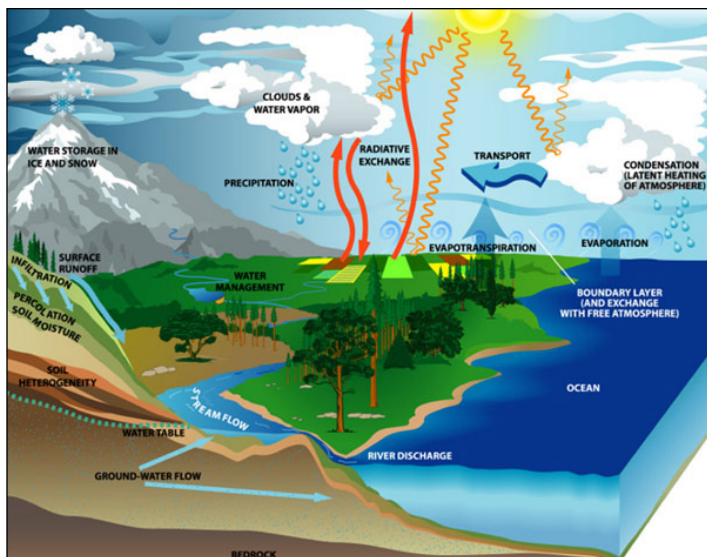


Figure 2. The hydrologic cycle moves water from the atmosphere to the land and eventually to the ocean. There are long and short paths, but the cycle is continuous.

and specifically in Minnesota. Some guidelines on water management techniques follow. This section should be helpful to anyone interested in understanding water, and water management, in Minnesota.

The Hydrologic Cycle in Minnesota

Water is a transient resource, always moving in a cyclic manner, although often by pathways and at rates imperceptible to our senses.

The classic illustrations of the hydrologic cycle are drawn at a continental scale (Figure 2) and show water evaporating from the oceans, raining down on mountains, and working its way back to the oceans as surface or ground water.

Minnesota is a headwaters state (Figure 3). If you view a map of our state that shows the major rivers, you'll recognize that water mostly flows out of

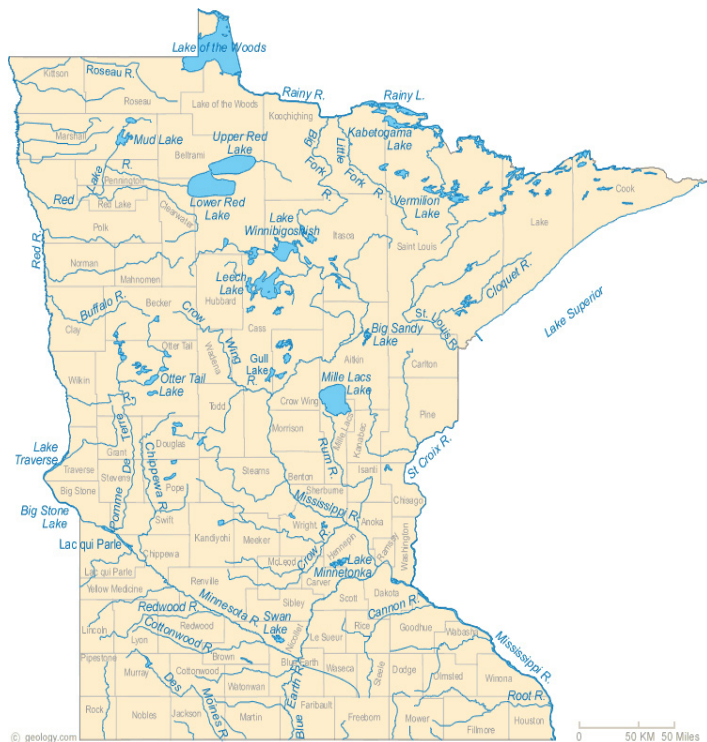


Figure 3. Minnesota is a headwaters state. Virtually all of our water arrives as precipitation that falls on our land and eventually leaves via rivers.

Minnesota, not into it. Rain and snow falling directly on our state are our main source of water, and any water that doesn't go back into the atmosphere via evaporation or transpiration leaves Minnesota as ground water, or by rivers.

That is good news. It means our water quality is self-determined. Unlike the situation in New Orleans or other downstream localities, our water arrives in relatively good condition as snow or rain. As it moves through the hydrologic cycle, its quality is largely determined by land use practices and other behaviors of Minnesotans. The quality of the water in our major rivers as they leave our state is affected by neighboring states that also contribute water to them, and its composition is also affected by the earth materials that

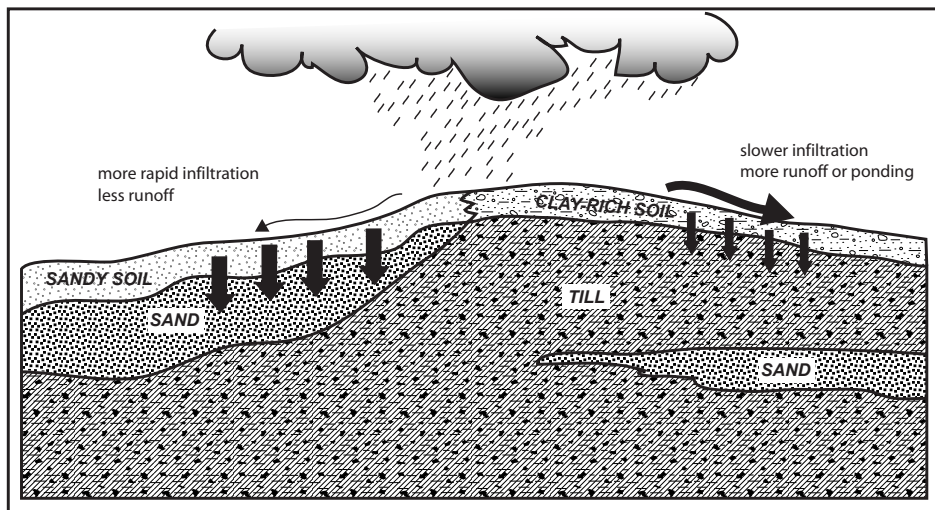


Figure 4. Infiltration as it relates to soil types.

contact it. However, the level of human-caused contaminants in that river water is a useful indicator of our collective effect on water.

As rain arrives in Minnesota it encounters the land surface—a surface with water-bearing characteristics that vary from place to place and even from season to season.

Some of the rainwater may travel across the land surface and enter streams or rivers and follow these drainages to our borders. Evaporation from lakes and rivers will return some of the water to the atmosphere. Some of the rainwater will enter the soil and either be utilized by plants (and transpired to the atmosphere) or continue to move downward and become ground water. The relative amounts of water that follow each of these paths are determined by soil type, vegetation, the presence of frost, slope, and conditions associated with our development of the landscape such as impervious surfaces, drain tile, ditching, storm water systems, and other hydrologic modifications.

One of the characteristics of soil that significantly controls infiltration (Figure 4) is its permeability. Permeability—the characteristic that allows water to soak into it and flow through it—is determined by the presence of pore space and the connectivity of those pores. The pores may be inherent to the sediment that makes up the soil, such as sand, or pores may be created by worms or other biologic activity. Permeable soils more readily admit water into the subsurface.

We have a winter season during which precipitation is largely frozen and unable to infiltrate. Or melt water is present, but the soil is frozen and resists infiltration. In the growing season the water demands of crops or native vegetation can intercept a large proportion of available water and thereby limit deeper infiltration. The movement of available water to subsoil zones is maximized during those seasons when the soil is not frozen and vegetation is dormant.

Water that does move below the land surface is called ground water, and this movement is called recharge.

Driven largely by gravity, recharge is also affected by pressure gradients that can cause water to move laterally or even upward in the subsurface environment. Over long periods ground water moves from higher elevations toward lower elevations and may discharge back to the land surface through springs. In Minnesota, ground water discharges into stream and rivers, which eventually flow toward the oceans.

It is this continuous discharge of ground water that keeps rivers flowing even during long periods without rain and is why our rivers do not dry up in January. When water is at the land surface we call it surface water, and when it is in the ground we call it ground water. However, the hydrologic cycle shows that it is the same water, moving from the surface into the ground and then back to the surface. It is a single

resource, best managed with an understanding of the path and rate at which it moves.

Beneath the soil of Minnesota there is a great variety of geologic materials, some of which can host and transmit water readily, and some of which impede the flow of water.

In some parts of Minnesota ground water can be found to depths of thousands of feet, although usable ground water is more commonly found within a few hundred feet of the

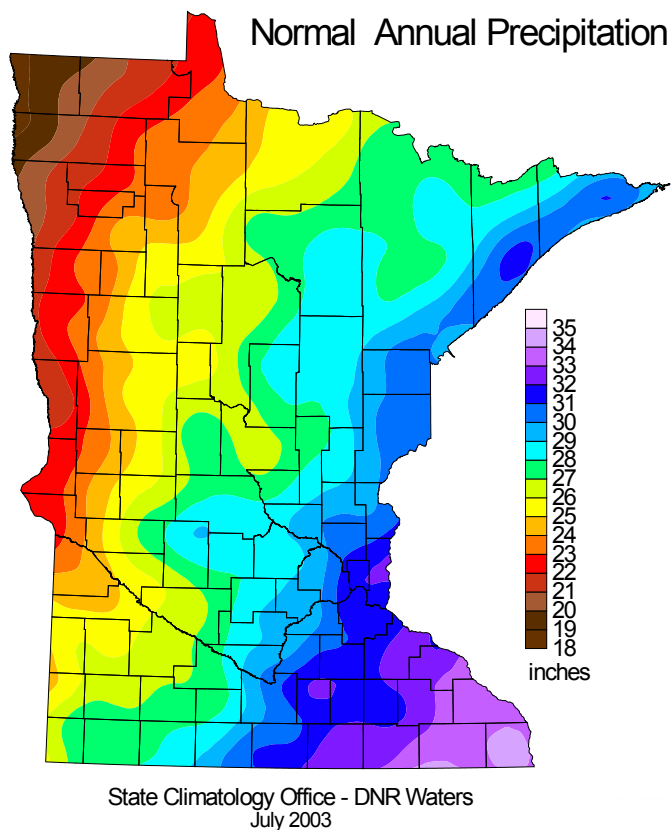


Figure 5. Distribution of annual precipitation in Minnesota

land's surface. In some places earth materials, such as granite or dense clay that cannot host or transmit significant amounts of water, extend to the land surface. Virtually no usable ground water exists beneath these places. A key point to keep in mind is that, in general, our water resources are usually separated from activities at the land surface by less than a few hundred feet of porous material, and often it is much less than that.

The Distribution of Precipitation and Recharge in Minnesota

Precipitation is not evenly distributed across Minnesota (Figure 5). The southeastern corner of Minnesota receives twice as much as the northwestern corner of the state.

The inequity of available potential ground water is compounded by the factors that influence infiltration rates, such as soil type, vegetation, season, and slope. Estimated recharge rates show that the clay-rich soils and geologic materials of western Minnesota tend to reduce the portion

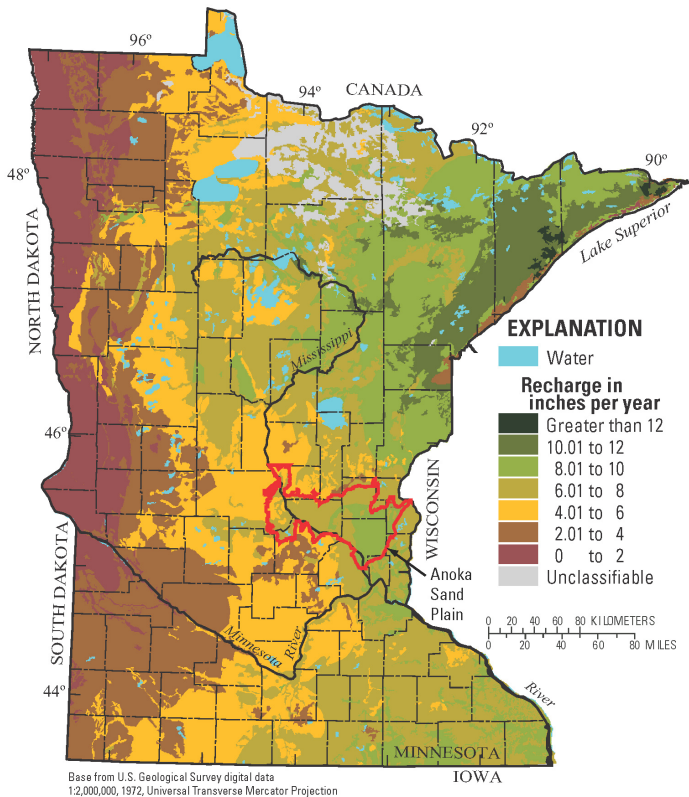


Figure 6. Distribution of recharge to groundwater across Minnesota; from USGS Fact Sheet 2007-3002, Jan. 2007

of precipitation that becomes ground water (Figure 6). At the same time, those factors increase the amount of rain and snow melt that runs overland to streams.

Ground water in western Minnesota is relatively less abundant partly because of these phenomena, and also because of the relative scarcity there of sand and gravel or bedrock types that are capable of storing water and acting as aquifers. The amount of precipitation that becomes ground water in eastern Minnesota is estimated to be as much as six times higher than in western Minnesota.

The Distribution of Water in Minnesota's Geologic Framework

As discussed above, ground water can only exist in the subsurface where pores provide space for it, and it can only move where those pores are effectively connected to each other.

Those pores are most common in sediment and sedimentary rocks- materials that accumulate from the breakdown of older rocks. Sand and sandstone are examples of earth materials that can have abundant pore space. The pores exist between the grains of sand. Similar to a container full of marbles, a body of sand has lots of space between the grains – spaces that water can occupy. In contrast, clay particles are shaped like plates. When packed, like sheets of paper stacked on top of each other, those clay particles have very little space that can be occupied by water. For that reason, clay-rich sediment cannot host much water, and even

a relatively small amount of clay mixed with sand can impede water flow by filling the pores or clogging the connections between pores. Limestone and dolomite are sedimentary rocks that generally don't have grains surrounded by pore spaces, but they do commonly have large fractures that can host and transmit large quantities of water.

Geologic materials formed by igneous or metamorphic processes, in which the rock is formed by crystallization of minerals, generally have very little porosity or permeability. They do not host or transmit water readily.

The geology of Minnesota can be conveniently divided into bedrock and glacial sediment. Bedrock ranges from millions to billions of years old and was formed by igneous, metamorphic, or sedimentary processes. Glacial sediment, is generally less than two million years old and deposited as unconsolidated clays, sands and gravels by continental glaciers and the meltwater that flowed from them.

Geologic maps show the distribution of these earth materials. Simplified maps at statewide scale provide a sense

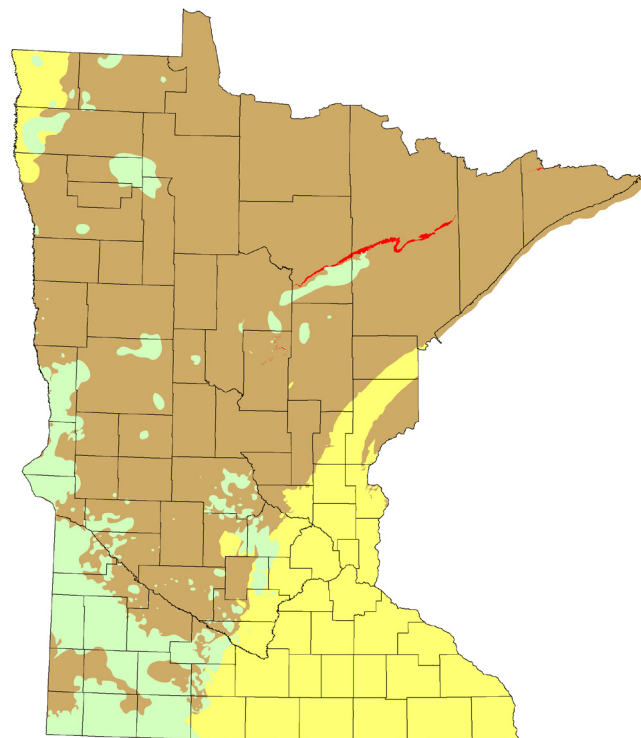


Figure 7. Bedrock units most likely to produce large quantities of water include the sedimentary rocks of northwestern and southeastern Minnesota (yellow) and the Biwabik Iron Formation (red). The sedimentary rocks of Cretaceous age (green) produce water in some areas, but in many places no suitable aquifer material is present. The igneous and metamorphic rocks (brown) typically produce small quantities of water, but only when the well intersects fractures in the rock.

of how ground water is distributed across the state.

In some places the bedrock contains water, in some places the glacial materials do. And in some places both, or neither, do. Similar maps can be made at scales useful for planning

and management by modifying the geologic maps found in the County Geologic Atlas Series.

The statewide bedrock map shows that the sedimentary bedrock units of southeastern Minnesota are an important

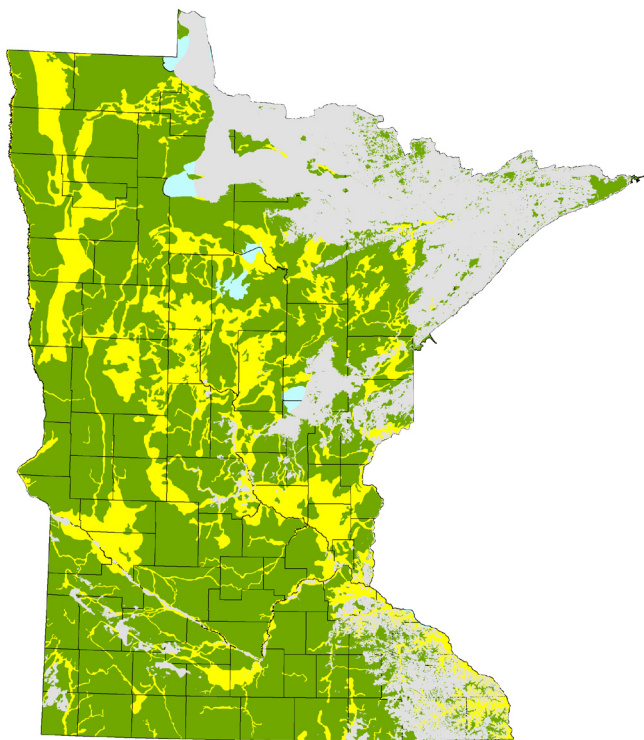


Figure 8. This map illustrates the general distribution of sandy (yellow) versus clayey (green) glacial deposits at the land surface. In the gray areas, the glacial deposits are less and 50 feet thick or absent completely. Although this map cannot illustrate the distribution of these materials in the third dimension (depth beneath the surface), they likely follow similar patterns related to equivalent processes of deposition. We know that subsurface sand bodies likely to act as aquifers are most abundant in the north-central part of the state and less abundant in the western and southern parts of the state.

ground water host (Figure 7). The igneous and metamorphic rocks that underlie the remainder of the state are generally not aquifers due to their lack of porosity and permeability. In some places these rocks are fractured, especially at the surface of the rock, and these cracks can hold and supply modest amounts of ground water to wells.

On the simplified map of the glacial sediments of Minnesota it is the sand- and gravel-rich deposits that serve as aquifers. These can occur as large sheets that cover many square miles or they can occur as smaller, isolated deposits. They can occur at the land surface, or buried beneath it and contained within clay-rich units. This map only shows the deposits at the land surface.

In northeastern Minnesota, where bedrock is at or very near the land surface, both glacial and bedrock sources of water can be difficult to find.

In southeastern Minnesota there are abundant bedrock aquifers, but the glacial sediment is thin or absent.

In south-central Minnesota there are bedrock aquifers, and abundant glacial sediment, but the glacial sediment is clay-rich and aquifers are difficult to find within it.

In southwestern, far west-central, and northwestern Minnesota most of the bedrock types are not highly productive as aquifers and the glacial sediment is very clay-rich, especially in the subsurface. It can be difficult to find aquifers, and wells often do not produce ample water. Water systems that distribute water long distances by pipeline are common in these areas.

In north-central Minnesota the bedrock does not yield abundantly, but the glacial sediments are sandy and yield large volumes of water.

In east-central Minnesota including the Twin Cities metro area and extending up to Carlton County, surficial and buried sand aquifers are often available and much of the bedrock is also considered aquifer material.

The Time Factor

The rate of water movement in the hydrologic cycle varies greatly. In the atmosphere large volumes of water can move hundreds of miles in a day as clouds. Water movement in rivers can also be relatively fast. For example, rates of water movement in the Mississippi River through the Twin Cities can be as fast as 260 cm/sec (8.5 feet per second or 5.8 miles/hour) and move as much as 150,000 cubic feet per second. Rainwater runoff moving over the land surface would be somewhat slower, more episodic, and of less volume. In the ground, movement of water is much slower, but extremely variable with rates as low as 10⁻⁹ centimeter per second (about 1 centimeter in 30 years, or an inch in 75 years) and as high as 1 centimeter per second (0.03 ft/sec or 0.02 mile/hour).

The rate of movement of ground water is determined by the pressure driving the water, and the ability of the host sediment to transport water. If there is little driving force,

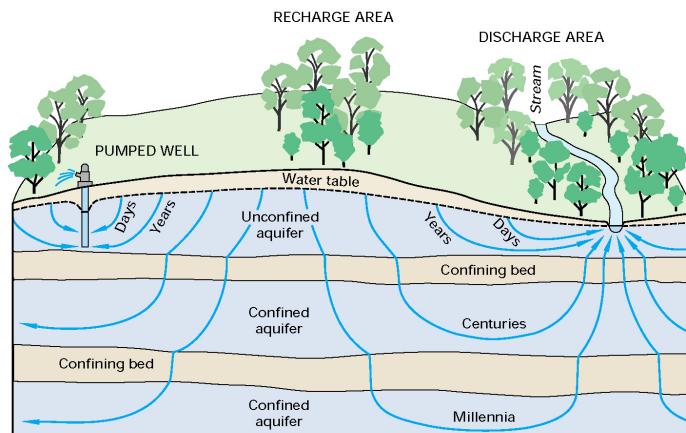


Figure 9. Ground water infiltrates and moves toward a stream where it discharges. If the water passes through materials that don't transmit water readily, the trip can take a very long time. From USGS Circular 1139, Winter and others, 1998.

water can be nearly stagnant. There are techniques available to measure how long water has been in subsurface aquifers. Some techniques work in the range of decades, while others are useful for water that entered the ground thousands of years ago. Water that has moved through materials that don't transport water readily, such as clay or shale, is often relatively old. Water that has traveled through multiple layers or great thicknesses of relatively impermeable materials may be thousands or even a few tens of thousands of years old (Figure 9.)

This slow movement of water can provide a false sense of security in our land use practices. Aquifers that are separated from the land surface by non-conductive materials may continue to pump high-quality water for a very long time

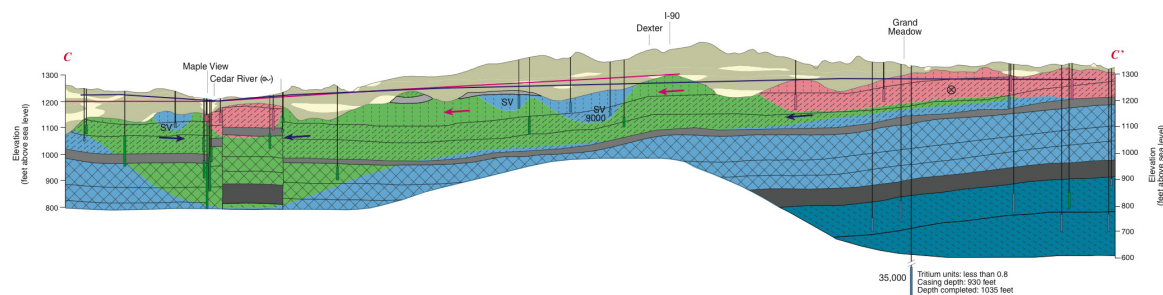


Figure 10. An example of the distribution of ground water by age. Blue is very old, green is mixed, and pink is young water. Geology and pumping can affect the rate at which water moves to depth. The gray layers are geologic materials that impede the flow of water. Where they are disrupted by faulting the young water is moving deeper more quickly. From DNR, Mower County Geologic Atlas Part B, Plate 7, Moira Campion.

regardless of how the land above them is treated.

The water they are providing entered the ground thousands of years ago, long before people lived here, and before the substances that typically contaminate our water even existed. This situation misleads people who believe the high quality of water from their wells shows their practices do not contaminate the ground water.

In those parts of Minnesota where aquifers receive recharge more quickly, the aquifers typically show contamination even though land use practices are no different than in places where aquifers are not yet affected. The slow movement of water delays the effects of these practices. Eventually, continued pumping of these aquifers creates a gradient that will accelerate the movement of water to replace what is pumped (Figure 10). Then the only water available to replace it will be that being generated at the land surface today.

Similarly, it is possible to significantly lower water levels in isolated aquifers by pumping and no effect may be noticeable at the land surface. However, this change in gradient will eventually cause a lowering of water levels in shallower aquifers and surface water bodies as they lose water downward toward the pumped aquifer. In some cases the rate of pumping may exceed the rate of recharge and the water level will continue to fall.

In summary, the availability and quality of water in Minnesota varies widely due to significantly different amounts of precipitation, varying rates of recharge, and different kinds and sizes and numbers of aquifers.

High quality ground water is often the result of slow water movement and the availability of slowly recharged aquifers, rather than the result of sound land use practices. Shallow ground water in areas of more rapid infiltration often is contaminated.

Determining the distribution and water-bearing characteristics of geologic materials on a scale appropriate for land use planning will help us delineate our aquifers, and to understand the connections between the land surface and

aquifers and between aquifers and surface water features. With that knowledge in hand value-based judgments can be made on what land use and water use practices are appropriate for the outcomes we desire. The atlases help policy-makers and

managers make informed judgments.

Managing Water Quality and Quantity Goals

Water is a vital resource and essential for a healthy economy. More water generally supports more people, or crops, or livestock, or wildlife, or businesses. However, there is a natural limit to the availability of water that is closely related to long-term precipitation levels. We act at our peril when we regularly pump ground water faster than it is being recharged.

Availability of water is also related to the quality of water. Many water uses – drinking water is the prime example -- have particular quality requirements, and water of lesser quality cannot fulfill those needs. For these reasons we wish to manage our water to maximize both its quality and quantity. If we take into account the needs of future generations, then we must manage our water in a way that doesn't limit its availability or quality in the future.

Water Budgets

The hydrologic cycle clearly shows that water moves through our landscape, with water arriving to balance that which is leaving. We also know that water can accumulate in large quantities in aquifers underground, and that it can reside there for long periods. In Minnesota, we typically choose to use aquifers as our water supply rather than collecting rain in reservoirs, because aquifers provide a more continuous supply, they are less sensitive to short-term variations in

the weather, and they are protected to some degree from contamination. However, it is possible to overuse aquifers and jeopardize the continuous supply we desire for ourselves and future generations. Taking too much water from aquifers can also draw down surface waters (lakes, rivers, wetlands, springs) that provide great benefit to humans, fish and wildlife.

By measuring precipitation, discharge of ground water to rivers, and other factors, we can estimate how much water moves through an area over time, and thereby determine how much we can use without causing a deficit.

This kind of study has been performed in Minnesota and water use has been compared to the recurring availability of

2005 Net Water Use as a Percent of the Renewable Resource

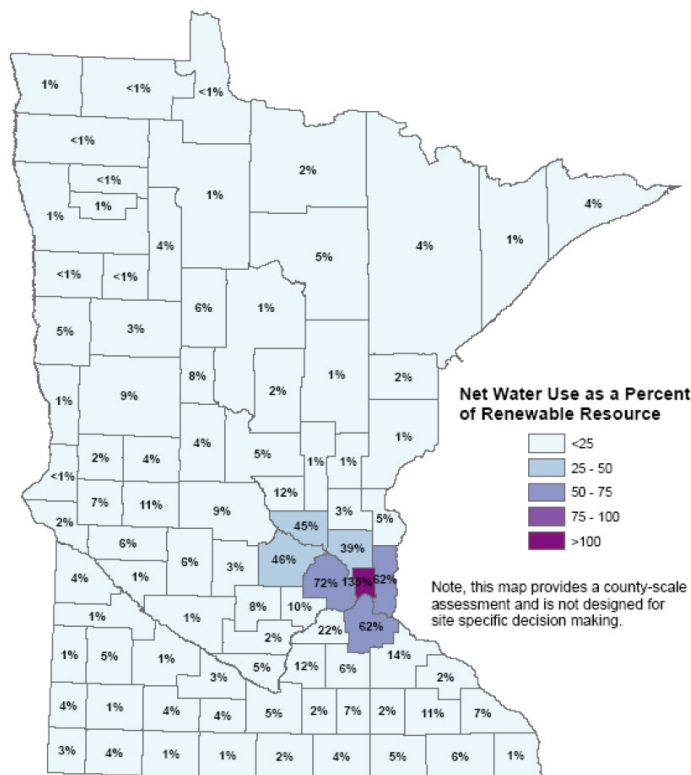


Figure 11. Water use in Minnesota by County

water on a county basis (see: Use of Minnesota's Renewable Water Resources- Moving Toward Sustainability- A report of the Environmental Quality Board and Department of Natural Resources, April 2007). It showed that over much of Minnesota human water use is only a small percentage of the estimated total water available although some of the highly populated counties used a large percentage of the available flux of water, and one county actually exceeded that amount (Figure 11).

To make the best use of this kind of estimate of water availability it is necessary to understand the distribution and water-bearing characteristics of aquifers, recharge, surface water features, water use (wells), and the ultimate fate of the water used. A budget must be constructed that accounts for

inputs and outputs of water. This is best accomplished in an area with boundaries that either do not allow the transfer of water, or where that transfer can be accurately measured or estimated. Political boundaries generally do not meet this requirement. Rivers are often used as boundaries in these exercises because they represent a measureable discharge of ground water. Factors such as precipitation, runoff, stream flow rates, evaporation, transpiration, and pumping are measured. A balance can then be determined. An outcome might be that XX gallons of water per year can be pumped within the boundaries of this area. However, more work may be necessary to determine where, and at what rate, that water can be taken without drawing down the aquifer, surface waters, or other wells beyond the capacity to recharge in a similar time frame.

The Impacts of Pumping

When we pump ground water there are three possible effects:

- Pumping lowers the water level in the vicinity of the well in the shape of a cone. The size and shape of the cone are determined by the water-bearing characteristics of the aquifer, and the rate of pumping. The resulting low spot causes water to flow toward the well. Recharge rates may increase as the cone of depression created by the pumping well captures water that would have gone somewhere else had the pumping not occurred.
- Discharge from the aquifer being pumped may decrease. For example, pumping from an aquifer feeding a spring may decrease discharge to the spring or even stop it from flowing.
- Pumping may lower the water level in the aquifer. This is a decrease in the water stored in the aquifer.

Commonly, more than one, or some combination of these effects occurs. It is important to recognize that pumping water out of the ground does have consequences and to decide which effects and outcomes are acceptable, and which are not.

Knowing where the aquifer is and what it is made of makes it possible to predict the impact of pumping on water levels and estimate the rates at which water can be withdrawn without harming other wells or surface waters.

How Much Is Too Much?

It is helpful to think of aquifers as a savings account. Precipitation and associated recharge are income, and pumping and discharge to surface waters are spending. When pumping and discharge exceed recharge, the aquifer level begins to fall. This is like spending money faster than your income provides it-- your bank account shrinks.

With aquifers, and bank accounts, we can use the resource faster than it is being replaced, but only temporarily. During a

multi-year drought, recharge is negligible and we continue to pump from our aquifers. The water level will begin to fall, but hopefully rain returns before the effects on the aquifer create problems. In order for the aquifers to recover fully, there must be a period in which recharge exceeds pumping causing the water level to rise.

There are places where aquifers are being pumped at rates that exceed recharge and the water levels in the aquifers continue to fall. This is clearly not sustainable because each aquifer has a finite thickness and eventually the water level will fall to the bottom of the aquifer and water will not be available.

In the Milwaukee, Wisconsin area aquifer water levels have fallen nearly 500 feet over the last 130 years and continue to fall. When determining a sustainable water supply rate, the question is not "how much water is in this aquifer?" but rather "at what rate does this aquifer recharge, and how does that rate compare to water use and the amounts required to maintain surface water features?" In Minnesota, where we have a life style, and economy, and identity closely linked to lakes and rivers and the fish and wildlife they support, keeping aquifer levels adequately high to maintain these surface waters is a priority.

Managing Water Quality

Water is often called the universal solvent. It tends to dissolve things it comes in contact with and these things then travel with the water. This is true of both natural and man-made compounds. Water in some of the aquifers of southwestern and western Minnesota has relatively high concentrations of sulfate from the sediments of the formations the water occupies or passed through. Some aquifers on the North Shore of Lake Superior contain saline water far saltier than seawater. These are naturally poor-quality waters.

Similar effects can occur when humans introduce wastes, road salt, solvents, pesticides, fertilizers, pharmaceuticals and other commonly used products into the hydrologic cycle. If I drop food on the ground I might wash it off before I eat it. However, all of our drinking water falls on the ground and we often have no opportunity to clean that water before we drink it. Even in large municipal water supply systems, water goes through a limited process designed mostly to remove pathogens and maintain clarity. These systems are not designed to remove many of the other contaminants we introduce. Furthermore, the treatment of wastewater doesn't always return it to its original quality. For example, individual sewage treatment systems that rural and some suburban homeowners rely on do a relatively good job of removing pathogens, but they don't remove the nitrates introduced by our wastes. Nor do they effectively remove some common pharmaceuticals.

Homeowners with wells as their primary source of

drinking water, rather than municipal water systems, consume "raw" untreated ground water that originally fell on fields, roads, feedlots, and all other parts of the land surface before moving underground.

Soil does have some capacity to improve water quality. In particular, soils with high organic content and thriving biologic activity are good at removing nutrients and breaking down some contaminants. However, these systems have a limited capacity that is often exceeded. Clay-rich soils and earth materials also have some capacity to bind contaminants and impede their travel. As mentioned earlier, most of us benefit from the slow movement of ground water that allows us access to water that entered the ground long before contaminants were introduced. That is not a permanent solution.

The key to managing water quality is to avoid or minimize contact of water with contaminants. When potential contaminants are introduced they should be introduced no faster than natural systems can utilize or break them down into harmless compounds or concentrations. There are also efforts under way to change the products we use every day so that they don't cause harm and can be removed or made harmless by natural systems or the treatment systems we employ.

Keeping Track- How Are We Doing?

Water supply managers track the water in wells to see if levels are being maintained and they continually analyze water samples to see if it is good enough for public use. A key to meaningful monitoring is knowing what land areas, what wells, and what activities can affect the quality or quantity of water in the monitored well. If the quality of water in a well shows a change, we need to know what land areas recharge that aquifer (via overland flow and infiltration), and what the land uses and practices on those lands are. This allows us to consider changes that will improve the water quality. If water levels show a continuous fall in a monitoring well we need to know what wells and natural discharge points utilize that aquifer so that we can change pumping practices and manage the impact on surface waters. In both cases, geologic maps at scales useful for planning and aquifer management, with associated data bases such as well information with locations and aquifers identified, are the necessary tools to understand and react to the situation. It is important to realize that monitoring is reactionary. Action is only taken after effects are seen, and the time lag common to ground water movement delays the signs of trouble, and increases the time necessary to correct problems.

Modeling- Predicting Outcomes

If a city anticipates growth, it plans for new wells to supply the necessary water. Installation of a new municipal well in the suburbs of the Metro Area can easily cost \$750,000. A permit is necessary and pumping tests may be required

before the permit is granted. If the tests show that the well is likely to negatively impact other wells or surface waters, the well may not be permitted, and the costs of constructing it are largely wasted. Hydrologists have mathematical means of predicting the effects of pumping if they have a good understanding of the distribution of earth materials and the water-bearing characteristics of those materials. A computer-based simulation (model) of the hydrologic system can be constructed and potential well locations can be tested before spending any funds on wells. These methods provide the means of predicting outcomes prior to expensive infrastructure investments. They can also be used to predict the spread of contaminants and to test the effectiveness of methods proposed to remove contamination.

Guidance and Best Practices for Water Management:

Choices about how we use water, and how much water we use, impact both water supply and water quality. An obvious choice is to minimize use. There is nothing to be gained from using more water than necessary, and use always comes at a cost. Minimizing transport of water and water quality degradation will also help maintain the water resources we need to maintain quality of life into the future.

Water availability and quality should be included in all planning exercises, not only plans focused on ground water. This is especially true for plans that affect the distribution of population, industrial development, and other water intensive development.

Here are some basic tenets of this conservative use philosophy:

- Utilize water in a manner that returns as much of it as possible to the location from which it was taken. Some water uses don't actually consume much water. Use within a home is a good example. Most of the water is used and then discharged to some type of wastewater treatment system. If it is an onsite wastewater treatment system (septic) the water is returned near the point it was taken, although probably not directly to the aquifer that supplied it. However, if it is discharged to a regional waste water treatment system the water may be discharged after treatment tens of miles from where it was found. In this case the use is not consumptive, but transports the water far from where it was taken. Lawn watering is a highly consumptive use. Most of the water is evaporated or transpired into the atmosphere and transported far from the location where it was obtained. Other examples of more consumptive use are bottling water or putting water into products that will be shipped away. Water use for cooling that evaporates the water is also highly consumptive.
- Surface water sources should be utilized first, and then the least confined aquifers (aquifers with the least

amount of low permeability overlying material). More confined aquifers should be used only as necessary. Deeper and more confined aquifers (those that recharge slowly through overlying materials that convey water at very low rates or over long distances) contain our highest quality water and water that will take a long time to replenish. These most valuable resources might be reserved for special purposes and special circumstances. An example of this is the Minnesota Statute that reserves use of the Mt. Simon aquifer in the Metro area for drinking water purposes and prohibits use of this resource for lower priority and nonessential purposes such as lawn watering. Surface water sources and less confined aquifers are easier to monitor, and respond more quickly to our actions. With shallow systems we are more likely to see the effects of our use and take action to manage those effects as opposed to utilizing deep systems that delay and obscure the effects of our practices.

- Return water should be of similar quality to the water that is taken -- water treatment technology should be evaluated and enhancements considered. The discharge of degraded water will impact our surface or ground water resources, or those downstream. The quality of our future water supply is directly related to the quality of water we put into the system today.
- Whenever possible, high-capacity water users should be directed to those places that have more water or less dependency on water. Utilize planning to avoid stressing resources unnecessarily.
- Water availability is fixed, but more can be done with the same volume of water through conservation and reuse. Some needs could be supported with reused water, lower quality water, or wastewater. Stormwater retention and use might also be useful.

Part 2: the Elements of a Geologic Atlas - how they are made, and how they can be used

Databases

Each atlas contains a database map that conveys the distribution of data used in the construction of the atlas products. Data types common to atlases are water well construction records; geophysical surveys (downhole, seismic, gravity, magnetic); outcrops of rock or exposures of subsoil materials; engineering, scientific, and exploration borings; cores and drill cuttings; and textural or chemical analyses of samples. All maps and atlas products use multiple data sources. Most of these data represent information about the geology or hydrology at the location they were collected. It

is up to the geologist or hydrologist to use their experience and knowledge to fill in the spaces between the data points to create a map. It is prudent when using the maps to look at the database map to evaluate how much, and what types, of data were available to support the map. Most of these data will be discussed in the description of the maps or atlas products they support. The County Well Index database will be discussed here in detail because of it is the most abundant data type, it is used for many applications, and it is useful as a stand-alone resource.

County Well Index (CWI)

The County Well Index (CWI) database contains information about more than 450,000 wells drilled across Minnesota. These records include information useful to geologic mapping and hydrologic investigations such as descriptions of the sediment and rock penetrated by the well, and the water level of the aquifer that supplies water to the well. Some of these records came from the personal records of well drilling contractors who collected this information

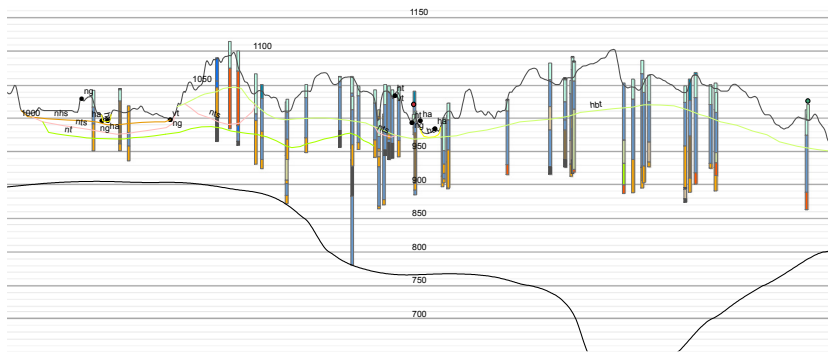


Figure 13. A plot of CWI data projected to a cross-section line. The vertical lines represent wells and the colors represent different sediment types (clay, sand, gravel, silt, till). The upper black line indicates the elevation of the land surface, the bottom black line the elevation of the bedrock surface. Colored lines between represent geologic units.

for their own use. The bulk of the records were submitted as required by law, beginning in 1974. The database is operated cooperatively by the Minnesota Geological Survey (MGS) and the Minnesota Department of Health (MDH). MGS adds value to the well information by interpreting the descriptions of the materials penetrated by the well and assigning more formal rock and sediment names and aquifer designations common to the geologic framework of Minnesota. This provides a common understanding and consistency among the many users of CWI including resource management agencies, state and local government units, consultants, engineers, drillers, citizens, and researchers.

Each well record that is submitted has information about where the well is located. MGS and others have established accurate, field-checked locations for 235,000 of the wells (51%) and most of these are part of a geographic information system (GIS) file that can be used to create map products based on the well information. Users can obtain

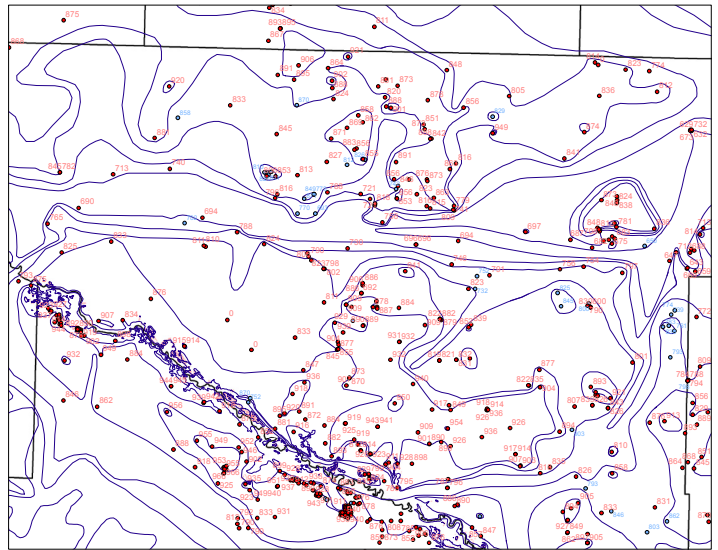


Figure 12. A plot of CWI data points labeled with the elevation of the bedrock surface. A geologist has drawn contours of the bedrock surface elevation in a geographic information system program.

CWI information online at <http://www.health.state.mn.us/divs/eh/cwi/> and it is also distributed on DVDs by the MGS Map Sales Office.

MGS uses the CWI information in creating geologic maps, including those constructed for county geologic atlases. In the process of building a geologic atlas, MGS or its local partner verifies the locations and elevations for wells of a particular county. Geologic units and aquifers are identified as part of the map-making process. That process compiles information from many wells into a geologic map and allows us to recognize and assign formal names to geologic units common to multiple well records.

CWI data is often plotted in map view with unit

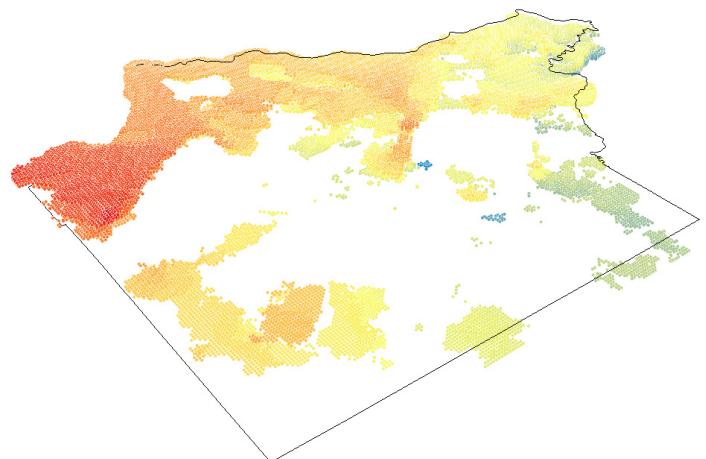


Figure 14. A depiction of sand distribution in Wright County generated by a statistical treatment of CWI data. Color indicates elevation above sea level (red-higher, blue-lower). The program can be adjusted to yield different scenarios for the geologist to consider in creating maps. The program calculates the likelihood of sand occurring in areas between known data points.

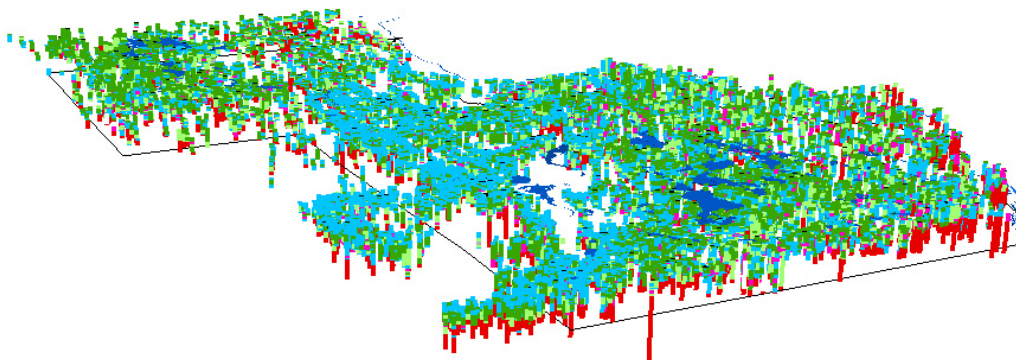


Figure 15. A three-dimensional view of CWI data for Chisago County. The wells are color-coded (red indicates bedrock, green-clay or till, and blue-sand). The dark blue bodies are surface lakes. The data can be tilted or rotated to any perspective, and the scale can be changed for added detail.

elevations or water levels or other features labeled to support mapping of those features (Figure 12). The well data is also projected to lines and color-coded by lithology (sediment type) to facilitate the drafting of cross-sectional views of geologic strata (Figure 13). We also utilize GIS programs to generate three-dimensional representations of geologic materials to assist geologists in mapping (Figure 14) and to provide a “big picture” view of large data sets (Figure 15).

Quaternary Data Index (QDI)

MGS has developed a new database called Quaternary Data Index that contains information related to unconsolidated deposits, usually at depths of less than 50 feet. The database structure is similar to the County Well Index, but has added capabilities to allow the inclusion of engineering test results, textural analyses (grain size distribution, sand lithology), outcrop descriptions, and other data.

The data come from MGS investigations and analyses, current or previous projects, and from external sources. Currently it is our intention to add data as we need it to complete current projects. It is not a comprehensive database like CWI that strives to collect all the data of a certain type, and at this time it is not a public database. It is specifically designed to support geologic mapping, and it is populated to support our current projects.

Geophysical Data

Geophysical data are measurements of the properties of earth and earth materials. Often these measurements are useful in identifying and mapping bodies of rock or sediment, and some of these techniques can “see through” overlying materials and allow us to map units that are not exposed at the land surface. There are techniques applicable to many kinds of earth materials, but in the County Geologic Atlas program geophysics is most commonly applied to mapping features of the bedrock.

The density of the bedrock beneath us causes subtle variations in the earth’s gravitational field. By measuring the intensity of gravity at many places across the landscape

we can infer what rock type lies below, and how deeply it is buried under unconsolidated materials left by glacial activity. Approximately 60,000 gravity measurements have been made in Minnesota and this data set is particularly useful in mapping the igneous and metamorphic rocks that occur beneath glacial materials or younger sedimentary bedrock.

The earth’s magnetic field is affected by the distribution of magnetic minerals (mostly magnetite). In Minnesota these minerals are mostly found in the bedrock, but magnetite in particular can be concentrated in glacial stream sediments as well. The magnetic field variations across Minnesota has been well-documented by an airborne survey of the entire state (Figure 16). An airplane towed a magnetometer across the state in a grid pattern and recorded magnetic intensity. That information can be manipulated mathematically to discern the spatial geometry of bodies of rock and the presence of faults. This method is particularly useful in Minnesota where the bedrock is mostly buried and therefore not visible. Minnesota has a particularly high quality set of magnetic data and it is used

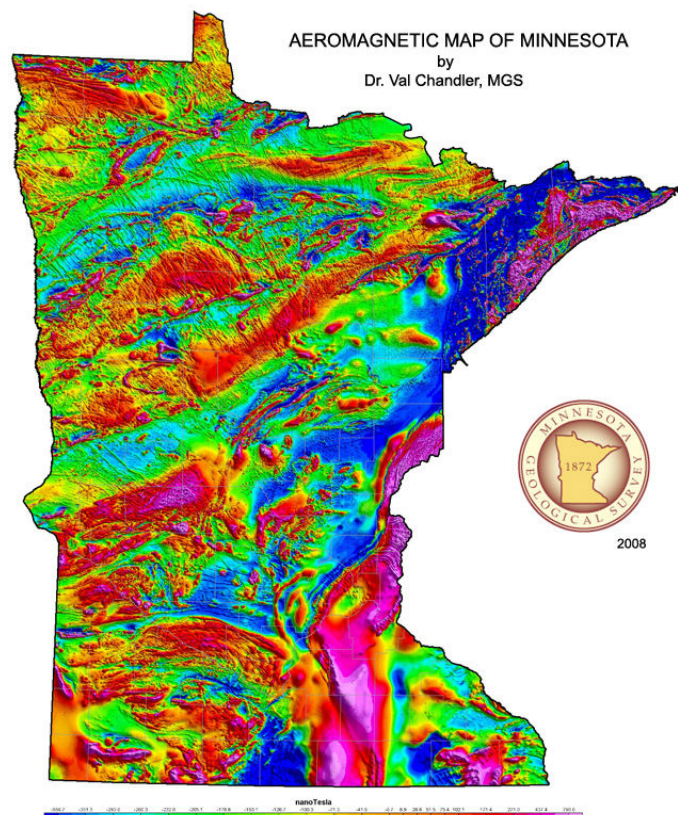


Figure 16. Aeromagnetic anomaly map of Minnesota showing variations of the ambient magnetic field as a function of bedrock geology.

in the construction of virtually all maps of igneous and metamorphic bedrock.

Geologic interpretation of gravity and magnetic anomaly data is greatly enhanced if density, magnetic susceptibility and natural remnant magnetization (NRM) data are measured on representative rock-type samples. Rock property data help relate the patterns seen in gravity and magnetic field maps to the rock types that are likely causing those patterns. The patterns are also compared to the rocks found in outcrops and drill core samples to verify correlations. MGS maintains a database of rock property data acquired over the last two decades. Additional data have been gleaned from studies done elsewhere on rocks similar to, or identical to those found in Minnesota.

Our understanding of subsurface conditions can also be improved with seismic geophysical investigations. Traditional seismic studies use an energy source to send mechanical waves into the ground. The location and timing of the “echo” of these waves enables us to estimate the thickness of the glacial sediments that overlie the bedrock, and to infer the kind of rock. For this application a relatively small source of energy is used, for example, a sledge hammer and metal plate, or a five foot steel piston driven by a very large rubber band. In oil fields this technology is used to understand the arrangement of multiple layers of sedimentary rock. In Minnesota we are mostly applying it to measure the depth to bedrock, or the thickness of glacial material covering the bedrock.

In recent years the MGS has deployed a relatively new seismic method known as horizontal to vertical spectral ratio (HVSR) or more commonly passive seismic. This method relies on ambient energy in the subsurface (passive) rather than creating energy waves with an active source such as swinging a hammer onto a metal plate. Ambient sources include vehicle traffic, wind, tides, and low-frequency waves ubiquitous to the earth’s crust. A very small and portable instrument is used to collect data for 16 to 20 minutes and the data is processed to identify reflectors, such as the bedrock surface. Again, our focus is on identifying the position of the bedrock surface and how deeply it is buried. As we gain experience with this method we are developing better mathematical solutions that are calibrated to Minnesota geology and well-established well data.

The MGS also deploys geophysical instruments in boreholes, usually water wells or holes drilled for scientific purposes. Downhole geophysics is a technique developed in the oil fields that uses a variety of probes to measure properties of the rocks and sediment exposed in the borehole wall, and the water within those materials. The probe used most often in Minnesota measures natural gamma radiation. This is a naturally occurring phenomenon and the intensity of the radiation is generally related to the concentration of uranium, thorium, and potassium in the materials penetrated

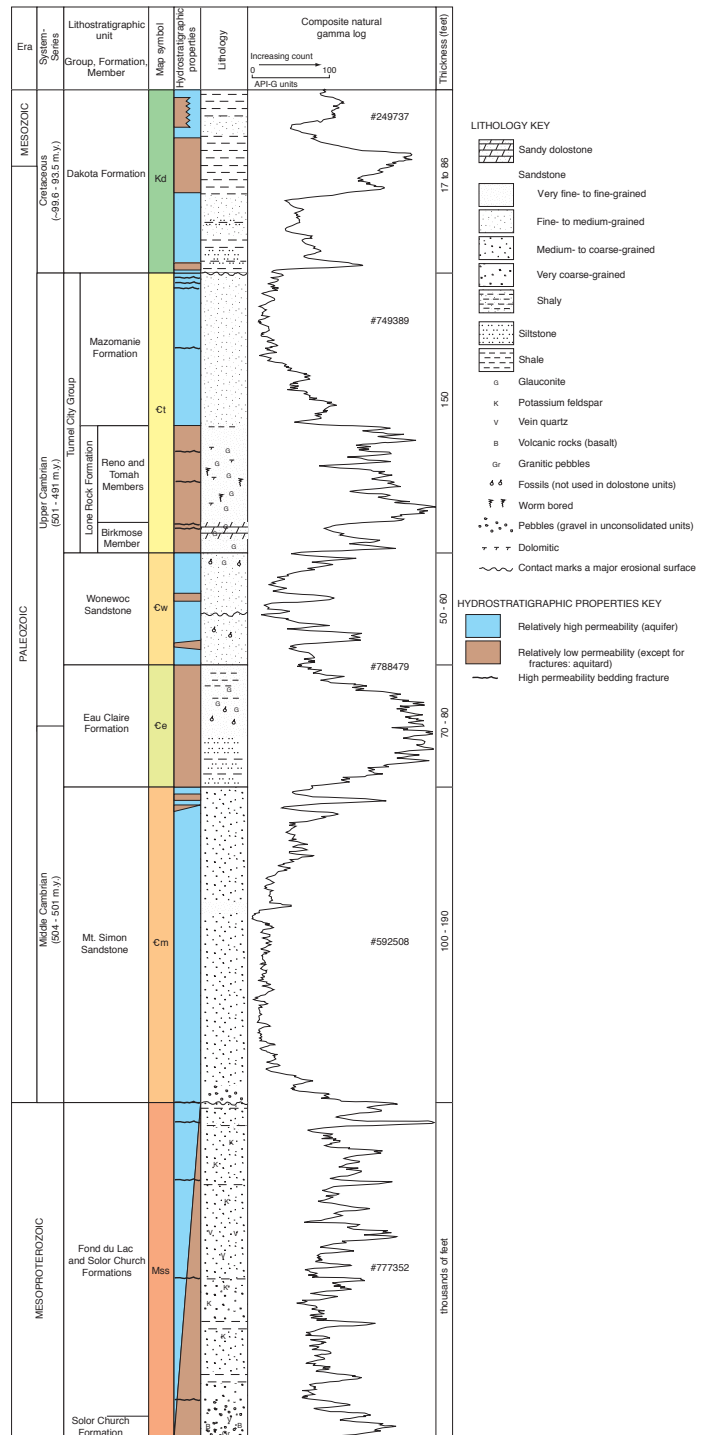


Figure 17. The line on the right is a measurement of the amount of natural gamma radiation emitted from rock in the subsurface as a function of depth in a well. On the left is the interpretation of the major rock units. In sedimentary sequences, the gamma plot is distinctive and consistent, making formations easier to recognize.

by the borehole. As the probe is raised from the borehole bottom a recorder notes the depth and the gamma radiation level continuously. The gamma radiation levels help us identify the rock types penetrated by the borehole or well.

When a number of surveys have been made in the same sequence of sedimentary rocks the graph of depth versus gamma radiation becomes like a signature, and the formations in the sequence can be readily recognized (Figure 17).

This technique is especially useful because it works even in boreholes with steel or plastic casing. We often conduct these surveys in water wells, either before a pump is installed, or when the pump is pulled for maintenance or abandonment. This allows us to acquire very reliable interpretations of the subsurface geology at very low cost. Other methods measure electrical properties, the shape of the borehole, or even the movement of water in the borehole. All of these can be interpreted to help us understand subsurface geology and hydrology. MGS has geophysical logs for more than 6,000 wells in Minnesota and we collect about 200 more each year.

Surficial Geologic Maps

A surficial geologic map depicts the properties of the geologic materials that exist at the land surface. In most parts of Minnesota the surficial geology map shows units associated with glaciation over the last 2 million years, and some more modern processes.

A surficial geologic map represents geologic (and related hydrologic) conditions at that important interface where precipitation either infiltrates and becomes ground water, or runs over the land surface and drains to a surface water feature. It is the same surface where almost all human activity takes place and potentially introduces contaminants into the hydrologic cycle.

The glacial materials can be divided into two major groups: unsorted materials (a mixture of grain sizes like gravel, sand, silt, and clay) deposited directly by ice, and sediment that has been sorted (separated by grain size) by water or wind. The sorted materials vary in their ability to convey water, with larger grain sizes (gravel and sand) generally being effective at hosting and transmitting water. Silt would be less effective, and clay generally impedes water movement. In the unsorted materials (called till or diamicton) the presence of clay, even in small amounts, greatly reduces the connectivity of pores and the resulting ability to convey water.

Both direct and indirect data types support surficial geologic mapping. Direct evidence includes examination and description of materials exposed at the land surface (unvegetated), descriptions of materials obtained from shallow borings, and descriptions of materials from the construction records of water wells. The geologic materials might also be inferred from landforms seen and described in the field, or recognized from topographic maps, stereo pair air photos that show relief, or LIDAR, a high-resolution measurement of the shape of the land surface. When landforms can be recognized as the product of certain glacial environments, their material composition can be ascribed with reasonable accuracy.



As a glacier advances, there is always meltwater issuing from the front. That water transports sediment from the glacier and sorts the sediment and then deposits various size components as the velocity of the water changes. Coarse

materials (cobbles and gravel) will only be carried by high energy water, intermediate materials (sand) require less energy, and clay will only be deposited when the energy of the water wanes and allows it to fall from suspension.

Traditionally, the geologist has been given a two-dimensional sheet of paper to record everything they know about the geologic units present in a map form. This may include the color and texture of the sediment, an interpretation of the geologic process responsible for its deposition, its relative thickness, which episode of glaciation deposited it, and to what degree erosion has affected it. This results in a relatively complex map, with many units, each representing a unique combination of these attributes, and each unit potentially present in multiple places on the map. However, this was the only way to convey all that information on a single map. Today we have the ability to record all that information in a computer-based geographic information system (GIS) and then create maps based on any one of the attributes, or any combination of the attributes that best serves our purpose. For example, if we were mostly interested in seeing where sand occurs at the land surface vs. clay, we could make a map based solely on that attribute with just a few key strokes (Figure 18). That map would be much simpler than the traditional geologic map, and it might be more meaningful and easier to use for certain purposes. The GIS also allows us to work with the combinations of geologic information and any other data with geographic (location) information. We could make a map to highlight where wetlands exist over sand, or to correlate vegetation patterns with geologic features. The traditional geologic map is still the most comprehensive method of conveying all the attributes of the surficial geology, and for that reason it is the style of map printed for the atlas. However, the digital version of the map provides the opportunity to create customized maps better suited to particular uses.

In addition to the geologic map, the atlases provide a detailed description of each map unit, map symbols that indicate the location of glacial landforms, a description of the physical characteristics of the deposits of each glacial advance, and a summary of the glacial history of the county (Figure 18).

The surficial geologic map is the precursor to some important resource management maps. Pollution sensitivity maps, as created by the DNR for Part B of geologic atlases, rely on the surficial geologic map to indicate areas where focused recharge is likely. This would correspond to areas where sorted deposits of sand and gravel occur at the land surface. Because these materials are capable of transmitting water relatively quickly, there is the potential for water-borne contaminants to enter the ground water system rapidly. This information can be helpful in deciding where activities that involve hazardous materials should take place, and in determining the appropriate response to spills of potential

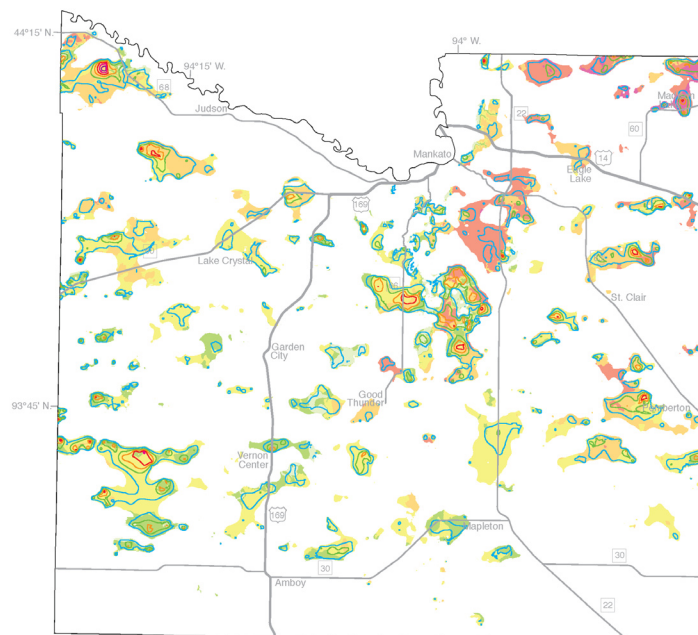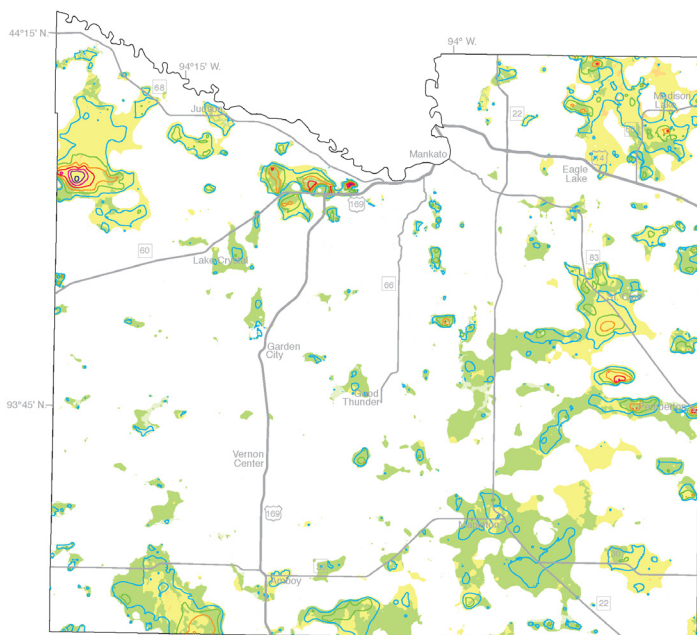

Figures 20 and 21. These are two of eight maps used to depict the distribution of sand at different stratigraphic intervals in Blue Earth County. At the same geographic location there may be an aquifer at one stratigraphic interval, and not at the other. The color indicates aerial distribution and depth from the land surface and the color contour lines indicate thickness of the sand bodies

sediments) in other places. Understanding and mapping these arrangements makes it possible to understand connections between wells, aquifers, and surface water features.

The Quaternary Stratigraphy products of an atlas include geologic cross-sections. A cross-section is a drawing that shows the vertical sequence of earth materials. The printed version of the atlas usually contains three to five cross-sections drawn across the county. These illustrations are based mostly on water well construction records (shown on the illustration), with additional information from a few scientific drillholes. The scientific holes produce core samples that are described and analyzed for grain size distribution. Occasionally samples of wood are found in the core and used to establish an age of the sediment that contained it. This is very helpful in establishing the sequence of events and their deposits. The cross-sections are based on the geologist's interpretation of glacial history and the units associated with these events (Figure 19).

The boundaries between till deposition events are the places where sorted deposits (sand and gravel) are most likely to be found. The boundaries mostly represent the land surface as it existed before the next ice lobe arrived, and that surface is where glacial meltwater would have deposited sorted sediment.

A unit called "Quaternary undifferentiated" is designated in those places where we have no well records or scientific drillholes to indicate the type of glacial material present.

In addition to cross-sections, the atlases provide a description of any units that are found only in the subsurface (and therefore are not described on the surficial geology map), and a diagram showing the relative age, distribution,

and provenance of the deposits of each ice lobe that traversed the county. Provenance is a term that describes the area or place from which the constituent materials of deposits were derived. The atlases also provide maps of the pathways of these lobes and their margins, and a model of the elevation of the land surface that is useful in recognizing the major drainageways, moraines, and other large landforms of the surface of the county.

Sand Distribution Models

The printed plate shows three to five cross-sections, but the geologists actually draw many more, usually spaced 1 kilometer (0.6 mile) apart. These sections are used to map continuous surfaces that form the boundaries between tills and between till and sand units. The contacts between geologic units in the cross-sections are connected laterally utilizing GIS methods. The surfaces that surround the sand and gravel bodies are then displayed as a series of maps, each describing the distribution of sand at a particular stratigraphic boundary with depths and thickness. The work of the DNR then confirms if these sands are aquifers, and creates maps of the water levels, water composition, and sensitivity of the aquifers to contamination.

The maps of the potential aquifers can be used to find a place where water is available, or to see what aquifers exist at a particular place (Figures 20 and 21).

A homeowner or drilling contractor might look at a specific location and see if one or more aquifers exist there and how deep and how thick they are. An industry looking to build a facility might look at all the aquifers across the county and then choose a place to build where the maps indicate a large and productive aquifer. As with all geologic atlas maps it is

best to confirm the map findings with on-site investigations. Planners might look at the map and use the information to protect the land area where a municipal well receives its recharge. Hydrologists evaluating a permit request for a high-capacity well might use the maps as part of an effort to determine if the well will affect a surface water body (lake, river, spring). This information is also useful in constructing hydrologic models. These models are computer-based numerical simulations of real geologic settings that are useful in predicting the effects of pumping.

Bedrock Topography and Depth to Bedrock Maps

Topography means the shape of a surface, and thus bedrock topography means the shape of the bedrock surface. Glacial sediment covers the bedrock surface over most of Minnesota, with the northeastern and southeastern parts of the state being significant exceptions. In southeastern Minnesota bedrock can often be seen exposed at the land surface, mostly in the valleys of modern rivers. In northeastern Minnesota there are areas where the bedrock is largely exposed, mostly in wilderness areas.

The shape of the bedrock surface, and its elevation, are mapped mostly with data from the records of wells and scientific and exploration drill holes. If the elevation of the land surface is known, and the depth at which bedrock was encountered is recorded, an elevation of the bedrock surface can be calculated at that place. Deep wells that don't hit bedrock also provide significant data because they are evidence that the bedrock surface is somewhat lower than the elevation of the bottom of the well. If data are closely-spaced it is possible to draw elevation contours that will reveal the highs and lows of the bedrock surface and possibly changes in relief related to changes in bedrock type. Some rock types are more resistant to erosion than others and therefore stand higher on the bedrock surface. With enough data it may be possible to recognize channels associated with drainage systems developed on the bedrock surface prior to burial. Geophysical data is used to augment the well data, especially in areas where wells are not common.

Geologists at MGS draw the contours representing the elevation the bedrock surface manually rather than using automated, computer-driven routines. The ability of the geologist to incorporate knowledge of the bedrock types and the history of the terrain is deemed worthy of the extra investment of time. We generally contour the data as though an integrated drainage pattern existed, even though glacial erosion may create closed basins in some places. The geologist usually uses GIS software to display and print the available data. They may draw contours on the computer monitor, or on a paper plot to be transferred later. Paper plots have the advantage of being larger than a computer screen and therefore able to show a larger area. The geologists frequently access online databases to read the well record or otherwise increase their understanding of data points as

they contour. Usually the geologist creating the bedrock topography works independently of the geologist mapping the bedrock. Then when both maps are in draft form they are compared and revisions made to increase correlation where appropriate.

The contour interval is chosen to be appropriate to the data density. Over much of Minnesota this is a 50-foot interval, although in some areas with many wells it may be possible to increase the level of detail and map at a 25- or even 20-foot interval. The accuracy of the elevations from the well records is about 5 feet because many of them are read from topographic maps of the land surface with 10-foot contours.

Depth to bedrock can be mapped in a similar manner by plotting depths as recorded in well records. However, a better map can be created by gridding the bedrock topography map and subtracting the elevation of each grid cell from a grid of land surface elevations. Gridding means dividing the map area into cells and assigning an elevation to each cell. This method is better at including the interpretive detail of the contours created by a geologist. MGS generally uses a 30-meter cell size. Usually the bedrock topography surface we draw is much smoother than the land surface topography. This smoothness is only an artifact of the relative lack of density of data used to describe the shape of the surface. The land surface topography is much more detailed and accurate than the bedrock surface because much more data is available to map it. When the values from the smoother bedrock surface are subtracted from the values from the detailed land surface the result is a grid that appears as detailed as the land surface. However, these values cannot be more accurate than the least-detailed of the two surfaces used to create it, and this must be understood by users.

In the southeastern third of Minnesota where sedimentary rocks occur the bedrock topography shows an integrated drainage pattern with relatively deep and narrow channels similar to those of the present day Mississippi River valley from St. Paul to Winona, or the present day St. Croix River valley from Osceola to Prescott. There are many valleys of similar size that are completely filled with glacial sediment, and therefore undetectable from the land surface. These are easily seen in the bedrock topography maps of that area.

Over the remainder of Minnesota, the bedrock surface character reflects the more resistant nature of igneous and metamorphic rocks, sometimes overlain by a thin cover of sedimentary rocks, and sometimes deeply weathered. The deep weathering was caused by tropical conditions about 100 million years ago, and perhaps by other episodes of similar conditions prior to that time. The heat, moisture, and acidic soil water related to rotting vegetation broke down the feldspars and other minerals common to these rocks and replaced them with clay minerals. Subsequent erosion resulted in the relatively smooth bedrock topography typical

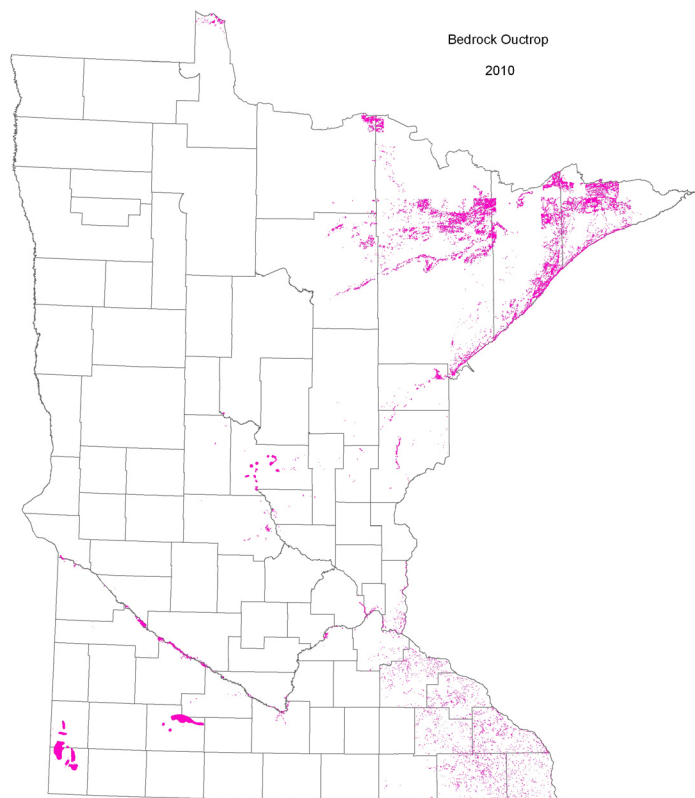


Figure 22. The distribution of bedrock outcrops in Minnesota. Many are too small to be seen at this scale. The major areas of outcrop are the Arrowhead region including the North Shore, Carlton, Pine, Morrison, Stearns, Pipestone, Rock, Cottonwood counties, the valleys of the Minnesota, Mississippi, and St. Croix Rivers, and many smaller valleys and bluffs in southeastern Minnesota.

of western Minnesota where the weathering residuum is still present in many areas.

Depth to bedrock can also be thought of, and called, glacial sediment thickness. Where the bedrock occurs at the land surface (outcrop, Figure 22) the depth to bedrock is zero, and no glacial sediment occurs. Where the depth to bedrock is 200 feet there is 200 feet of glacial sediment. When mapping the character of the glacial sediment for the Quaternary stratigraphy products, there are commonly places where one or two data points tell us that the bedrock surface is deep and the glacial sediment is thick, but we don't have sufficient data to know the character of that deep glacial sediment. Wells are drilled to access water, and if sufficient water is found at shallow depths there is no need to drill deeper. In those areas we may know that there is thick glacial sediment, but we are unable to describe or map its character.

Where the bedrock is not an aquifer, typical of igneous and metamorphic rocks, the bedrock surface represents the bottom of our hydrologic system. Water does not penetrate this surface, and no water will be found in appreciable quantities within these rocks. There are places in Minnesota (St. Cloud, the Arrowhead region, others) where igneous and metamorphic rocks are at the land surface, and are not

aquifers. In these places there is no significant ground water, and alternative sources (rain, impoundments, surface water bodies, pipeline systems) must be used.

Where sedimentary bedrock occurs, there may be a succession of strata, some of which are aquifers, and some of which are not. In these places there may be several aquifers at different depths to choose from and some may supply water with significantly different composition. They may be overlain by Quaternary aquifers as well.

Depth to bedrock can be an important consideration when mining of bedrock is considered. The depth to bedrock represents "overburden", or material that must be removed to access the desired bedrock. For example, the Jordan Sandstone formation contains sand grains with the right properties for use in enhancing oil and gas recovery. The Jordan exists over large parts of southeastern Minnesota. However, it is only a realistic target for mining where depth to bedrock is relatively small, perhaps less than 25 feet. With a geographic information system and the files from county geologic atlas maps it is easy to intersect the bedrock geology map with the depth to bedrock map to find places where the Jordan is accessible. The same situation exists with mining of dimension stone.

Bedrock Geology Maps

In Minnesota, bedrock formations are at least 100 million years old, and some are more than 3 billion years old. Bedrock is generally of interest for its potential to host minerals or water. However, it can also affect how we build roads and houses, and some bedrock is useful as a building material.

The bedrock map is based on descriptions of exposures of the rock (outcrops), descriptions from water well construction records and scientific and engineering borings, drill cuttings, core samples, and geophysical data. Geophysical methods are discussed in the database section of this document. Gravity and magnetic methods are used in mapping igneous and metamorphic rocks, and borehole geophysical methods are commonly used in mapping sedimentary bedrock (Figure 23 and Figure 24).

The bedrock geology map in a county geologic atlas tells us what kind of bedrock is first encountered at, or beneath, the land surface. Over most of Minnesota glacial sediment covers the bedrock. Bedrock is often exposed in southeastern Minnesota, in northeastern Minnesota, and in a few spots in central Minnesota and southwestern Minnesota.

In those places where igneous and metamorphic rock occurs the map tells us what type of rock occurs at the bedrock surface, and not much can be said about how thick that rock unit is, or what might be beneath it. The processes that create these rocks don't typically create a predictable vertical sequence of rock types.

does not attempt to identify grade, tonnage, value, or other economic factors.

There are many types of rock in Minnesota, and many variations in how they host and transmit ground water. We can divide the bedrock of Minnesota into two groups, one that includes igneous and metamorphic rocks and another group containing sedimentary rocks [see Figure 7].

The igneous and metamorphic rocks (granite, gabbro, basalt, schist, slate, quartzite, gneiss, greenstone, diabase, and others) form under high heat and pressure conditions and the rocks are composed of interlocking mineral grains with no pore space between them. Over time, fractures form in these rocks, most commonly near the top of the rock and less commonly at depth. Without pores, the rock itself cannot host or transmit water. However, fractures that connect to the land surface, or to overlying sand or other water bearing materials, can host and transmit water. These rocks (and the fractures within them) are the bottom of the hydrologic system in Minnesota, and water will not be found deeper than the zone of fractures within them. Wells drilled into igneous and metamorphic rocks produce water from such fractures. Where there are larger fractures and where wells are strongly connected with recharge zones the wells are most productive. Wells might also intersect a number of smaller fractures, each contributing a small amount of water, and collectively providing an adequate supply. Wells that are relatively deep provide storage capacity, and this can make a well that produces water slowly able to provide larger amounts episodically. The well fills when not in use, for example overnight, and then the water within is pumped out during daytime use. Wells are drilled vertically, and fractures are often also nearly vertical. This decreases the chance of a well intersecting a fracture. For this reason two wells drilled very near each other can have very different productivity and very different depths. Hydraulic fracturing is a technique developed in the petroleum industry to increase the productivity of wells in fractured rock. It utilizes high pressure to force open and clean the fractures, and then introduces sand grains or manufactured beads that prop open the fractures after the pressure is released. This has the effect of increasing the capacity of each fracture to conduct fluids, and also creates and connects fractures to promote flow. This technique has been adapted by the water well industry to improve the performance of water wells finished in non-porous, fractured rock. While some wells in igneous and metamorphic rocks will hit large fracture networks and produce lots of water, others will not, and some may be effectively dry holes, unsuitable for even a domestic supply.

In areas of igneous and metamorphic rocks the atlas products generally include a geologic map with unit descriptions, a correlation chart to show the relative age of the units, an aeromagnetic image, rock composition diagrams, a regional geologic map for context, and a summary of

the geologic history represented by the bedrock. Igneous and metamorphic rocks underlie all of Minnesota, but are overlain by sedimentary rocks, with the thickest and most continuous sequences occurring in southeastern Minnesota and northwestern Minnesota.

The sedimentary rocks (sandstone, shale, limestone, dolomite) of Minnesota formed as an accumulation of particles of rock or minerals eroded from pre-existing rocks, or shells and other parts of plants and animals, or accumulations of materials from chemical or biochemical processes. These rocks can have primary porosity (spaces between grains) or secondary porosity (fractures and dissolution features). The cement that binds particles together (such as in sandstone) can fully or partially fill the pores and reduce the ability of the rock to transmit water. The sandstones of Minnesota commonly transmit water via primary or secondary porosity, or both. The limestone and more common dolomite units transmit water mostly by secondary porosity, utilizing horizontal and vertical fractures that in many cases have been enlarged by dissolution of the material around them. Shale is an example of a sedimentary rock that, due to its lack of porosity, does not usually transmit water readily. This rock type is also less likely to host fractures, probably due to its ability to relieve stress by bending rather than breaking. These major sedimentary rock types are typically found in layers, and while they sometimes have thicknesses of hundreds of feet, there are also many places where thin layers of various rock types occur in close vertical proximity. Formation names have often been assigned on the basis of time boundaries rather than rock type, and more than one rock type can be included in a formation.

In areas of sedimentary rocks the products generally include a geologic map with unit descriptions, a correlation chart to show the relative age of the units, cross-sections to show the vertical sequence of units, digital surfaces (topographies) on some of the unit tops, and a geologic column with ages, names, rock types, sedimentary structures, and a composite gamma log, and a summary of geologic history represented by those rocks.

Geologic Atlas Uses

The sections above have described some uses of individual atlas components. Many uses require information from more than one component.

Ground water modeling provides a numerical simulation of water movement by assigning hydrologic properties to earth materials and utilizing mathematical equations to predict how water will move through those materials. The atlases provide an account of the distribution of earth materials and in many cases their hydrologic properties. The database of well records provides information on where water is being pumped, which affects the simulation. Ground water models are typically calibrated against known water levels, and the

water levels reported in Part B of the atlases provide this type of information.

The quality and quantity of water in an aquifer can be monitored by measuring the water level on a regular schedule, and analyzing the composition of the water to detect changes over time. However, this information is of limited value if we don't understand what is causing the changes we observe. We need to know what land areas contribute water to that aquifer, where the boundaries of the aquifer are located, and how other wells and surface water features utilize water from that same aquifer. All of this information is needed to make effective use of monitoring data, and the maps and databases of the atlases provide much of this information.

Public water supply wells serve many people and therefore the quality of water they produce is very important. The information in the atlases is used to create plans that protect those wells (called wellhead protection plans). These plans use geologic and hydrologic information to identify where the water supply to these wells is coming from, and how long it takes to travel there. Those calculations are used to delineate the land area that most immediately affects the quality of the water produced by the well. Special land use regulations are typically applied to that land area to protect the water supply.

To protect and make wise use of the water resource we need to focus water use on those aquifers and places

that won't be negatively impacted, and we need to isolate contaminants, or activities with high potential to cause contamination where water is not present or there is a higher level of natural protection of the resource. The atlases tell us where the largest and most productive aquifers are and how they are (or aren't) connected to surface water. Conversely, the atlases can also direct us to those areas where aquifers don't exist or are separated from the land surface by thick deposits of material that impede the flow of water. These places are more appropriate sites for activities that involve materials we would like to isolate from the water resource.

Summary

This tour of the "basement" of our earthly house has described some of its most important systems and how they must be maintained to support us. The geology of our state controls where water can be stored, where it can move, and how readily the quality and quantity of water can be affected by our activities. Water is the most essential natural resource and the County Geologic Atlases provide information that is fundamental to effective management of that resource. They compile and present factual observations that will be useful forever, and interpretations that may be improved upon when more information and technology are available.

